

Infrared heater Standard wall

Standard wall 400W

30×120cm, 3.6kg/4.75kg*

VCIR-30-120-400-L

Standard wall 750 – 800W

60×120cm

7.35kg
9.05kg*

VCIR-60-120-800

VCIR-60-120-800

Standard wall 300W

30×90cm

2.95kg/3.8kg* VCIR-30-90-300

Standard wall 550 – 600W

60×90cm

5.8kg
7.2kg*

VCIR-60-90-600

VCIR-60-90-600

Standard wall 400W

60×60cm

3.95kg/5kg*

VCIR-60-60-400

VCIR-60-60-400



Conformity:

EN 60335-1: 2012+A11
EN 60335-2-30 : 2009+A11
EN 62233 : 2008
EN60601-1 : 2006
EN60601-1 : 2001
EN 6100.3.3.2013
EN 61000.3.2.2014
EN 60529 :1991+A1+A2

Infrapower® GmbH

Rudolf Hausner Gasse 3
1220 Vienna

www.infrapowerworld.com
office@infrapowerworld.com
Tel.: +43 (0) 1 734 1083

Voltage

230V/50Hz

Overheating protection

Integrated temperature sensors

Protection class

IP65

Connection

(3 × 0.75mm²)
Length 1.8m color white with „schuko plug“

Control/Thermostat

compatible with "Öko-design" conform units

Radiation array

130° – 140°

Degree of efficiency

Class I according to
DIN EN60675/A2
VDE 0705-675/A2:2018-11

Emission ratio

90%

Color front/ frame

Aluminum, coated,
matt white

Surface temperature

front / rear at

22°C room temperature


100° C / 50° C

* weight incl. packaging

©2019 Infrapower GmbH, Subject to changes, printing and typesetting errors.
All specs within a tolerance of +/- 10%

Standard wall

Mounting and connections

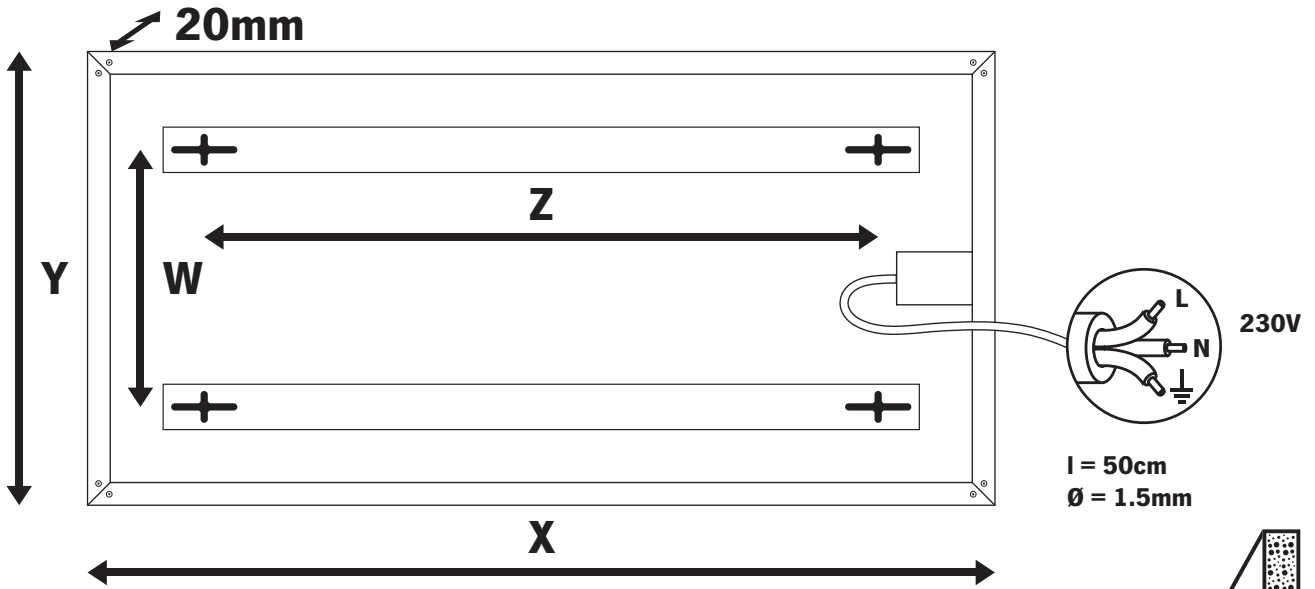

	X	Y	Z	W
800W	1200mm	600mm	570mm	300mm
600W	900mm	600mm	570mm	300mm
400W	1200mm	300mm	400mm	115mm
400W	600mm	600mm	300mm	270mm
300W	900mm	300mm	400mm	115mm

